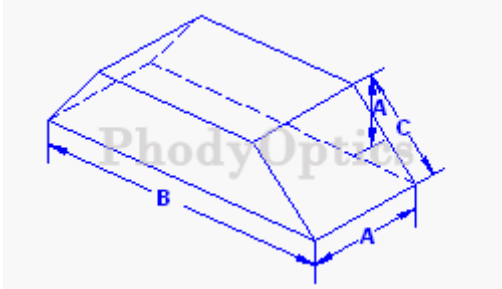



Dove Prisms

Material:	BK7 or UV Fused Silica	
Diameter Tolerance:	+0.1,-0.1mm	
Surface Figure:	$\lambda/2$ — $\lambda/10@632.8\text{nm}$	
Surface Quality:	40-20 scratch and dig	
Centration:	30 arc sec — 3 arc min	
Clear Aperture:	>90%	
Bevel:	<0.25mm x 45°	
Coating:	specified by customer	

Dove Prisms

Part No.	A(mm)	B(mm)	C(mm)
DOVE05	5.00	21.18	7.07
DOVE10	10.00	42.37	14.14
DOVE15	15.00	63.55	21.21
DOVE18	18.00	76.10	25.45
DOVE20	20.00	81.30	28.28
DOVE25	25.00	105.68	35.36
DOVE30	30.00	127.10	42.43