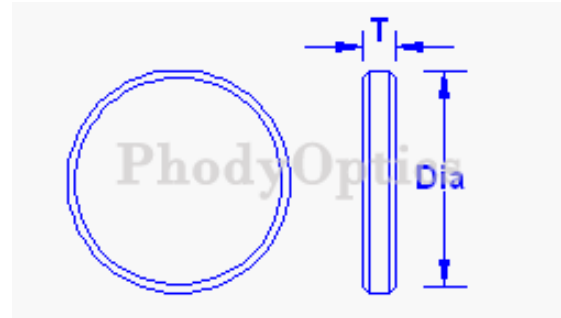



UV Fused Silica Round Optical Windows

Material:	UV Fused Silica
Diameter Tolerance:	+0.0,-0.1mm
Center Thickness:	±0.1mm
Surface Figure:	$\lambda/4@632.8\text{nm}$
Surface Quality:	40-20 scratch and dig
Parallelism:	1 arc minutes
Clear Aperture:	>90%
Bevel:	<0.25mm x 45°
Coating:	specified by customer


UV Fused Silica Optical windows

Part No.	Dia(mm)	T(mm)
RW0602-FS	6.00	2.00
RW1003-FS	10.00	3.00
RW1203-FS	12.70	3.00
RW1503-FS	15.00	3.00
RW2003-FS	20.00	3.00
RW2503-FS	25.40	3.00
RW3005-FS	30.00	5.00
RW3805-FS	38.10	5.00
RW5005-FS	50.80	5.00
RW7510-FS	75.00	10.00
RW1015-FS	100.00	12.00
RW1520-FS	150.00	20.00